

002

B-2

(12) **UK Patent Application** (19) **GB** (11) **2 290 622** (13) **A**

(43) Date of A Publication 03.01.1996

(21) Application No 9511962.4

(22) Date of Filing 13.06.1995

(30) Priority Data

(31) 08265587 (32) 24.06.1994 (33) US

(71) Applicant(s)

**Omega Engineering Incorporated**

**(Incorporated in USA - Delaware)**

**One Stamford Drive, Stamford, CT 06907-0047,  
Delaware, United States of America**

(72) Inventor(s)

**Milton B Hollander  
William Earl McKinley**

(74) Agent and/or Address for Service

**Barlin Associates  
Barlin House, 50 Throwley Way, SUTTON, Surrey,  
SM1 4BW, United Kingdom**

(51) INT. CL<sup>6</sup>

**G01R 15/14**

(52) UK CL (Edition O )

**G1U UR1514**

(56) Documents Cited

**GB 2221763 A GB 2178176 A GB 2165126 A  
GB 2005846 A EP 0617392 A1 WO 94/11851 A1  
US 5136285 A**

(58) Field of Search

**UK CL (Edition N ) G1U UR106 UR1300 UR1302  
UR1514 UR1522 UR1524 UR1526 , H4L LDA  
INT CL<sup>6</sup> G01R 1/06 13/00 13/02 15/14 15/22 15/24  
15/26  
On-line: WPI, CLAIMS, EDOC.**

(54) **Radiant wave energy-coupled test meter**

(57) A sensing probe assembly is provided for an electrical test meter of the type having microprocessor 1300 responsive to electrical signals for changing various aspects of the test meter display 1700 and operating mode functions.

It comprises a first universally movable sensing probe 16 having a probe housing; a wave energy signal transmitter 1650 mounted on said probe housing; power supply coupling means 1604 mounted on said probe housing and electrically coupled to the wave energy signal transmitter 1650 for coupling a source of electrical energy thereto and a sensor 18 mounted to said probe housing for sensing a parameter of an external object. The sensor 18 is electrically connected to the wave energy signal transmitter 1650 for delivering thereto an electrical signal representative of a sensed value of the said parameter. The wave energy signal transmitter 1650 is electrically coupled to the power supply coupling means 1604 for transmitting externally of the probe housing in wave energy form, a signal representative of a sensed value of the said parameter, for receipt by a test meter unit 1000 having a wave energy receiver 1200 associated therewith.

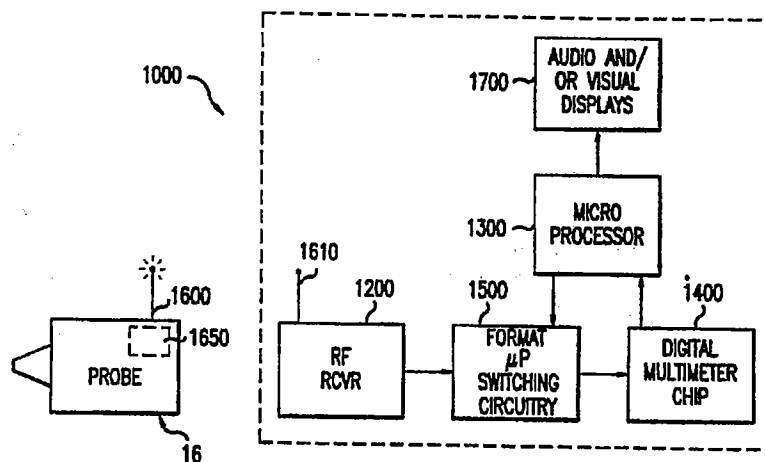


FIG.1

GB 2 290 622 A